

# Super Slim LED Power Supply

## CV Version



### Reliable Technical Data


- Rated Input Voltage:200-240VAC
- Input Frequency:50Hz
- Output Power:20W
- Body:PC
- Open Circuit;Short Circuit;Over Load;
- Over Heat Protection



## CC Version



### Dimension in mm

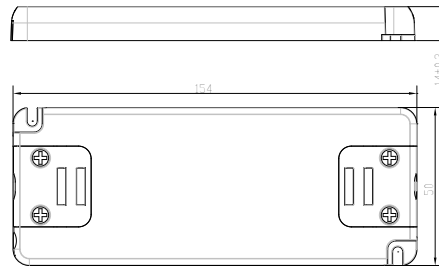

- Safety According to EN61347-1,EN61347-2-13
- EMI According to EN55015
- EMS According to EN61000-3-2;EN61000-3-3;EN61547
- EMF According to EN62493-2010
- Approbation Mark:CE ROHS;TUV;C-Tick

### Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant output voltage	Load	Max output Current	PF	Ta	Tc	L×W×H	Approval
SNP20-12VF	12V	0-20W	1.67A	≥0.5	45°C	80°C	154X50X14	TUV SAA
SNP20-24VF	24V	0-20W	0.84A	≥0.5	45°C	80°C	154X50X14	TUV SAA

Model No.	Constant output Current	Load	Max output Voltage	PF	Ta	Tc	L×W×H	Approval
SNP20-350IF	350mA	11-20W	56VDC	≥0.5	45°C	80°C	154X50X14	TUV SAA
SNP20-500IF	500mA	11-20W	40VDC	≥0.5	45°C	80°C	154X50X14	TUV SAA
SNP20-700IF	700mA	10-20W	29VDC	≥0.5	45°C	80°C	154X50X14	TUV SAA